


Super Mount/ Cushy Foot Mount


Ahmedabad Moulds Supermounts are housed together specially designed to achieve much higher deflections compared to simple rubber in compression devices and therefore are superior in isolation frequency vibration. The mountings are designed to iron castings for protection against oil and mechanical damage. These have very low frequencies and possess good lateral stability.

No need to bolt the machine. No need of Grouting in rag bolt. The super mounting can be supplied with bottom friction pads to avoid costly Grouting/Anchoring to floor the equipment. Additionally, shifting the location of the instrumentation with very few effects.

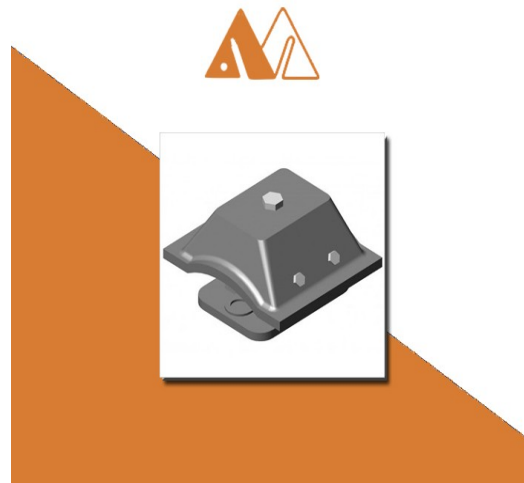

Application:-

- Generator Diesel engine
- Printing machinery
- Cooling towers
- Pumps fans and blowers
- Lift Headgear
- Engine Mounting for road vehicles
- FD & ID Fans

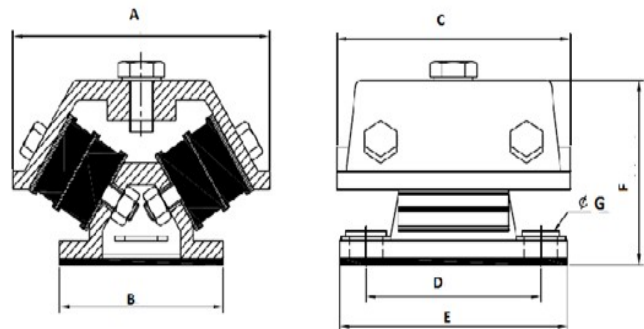

PRODUCT CODE	MAX LOAD (K.G)	DIMENSION (MM)							DEFLECTION(MM)	BOLT SIZE & THREAD
		A	B	C	D	E	F	G		
AMS-1	120	136	82	126	90	114	74	12.7	5.8	12MM
AMS-2	190	136	82	126	90	114	74	12.7	5.6	12MM
AMS-3	270	200	141	218	166	196	74	16	5.2	16MM